

流量選定チャート

FlowCon SH

フローコン SH

接続口径：DN15/20(型番：1A00000)=15A(1/2"), 20A(3/4")

DN25/32(型番：1A00001)=25A(1"), 32A(1-1/4"), 40A(1-1/2")

ダイヤル設定値	DN15/20 NO:1A00000			DN25/32 NO:1A00001		
	L/sec	L/min	公差 (±5%)	L/sec	L/min	公差 (±5%)
0.5	0.003 *	0.18	0.17 ~ 0.19	0.044	2.64	2.51 ~ 2.77
0.6	0.015 *	0.90	0.86 ~ 0.95	0.095	5.70	5.42 ~ 5.99
0.7	0.030 *	1.80	1.71 ~ 1.89	0.145	8.70	8.27 ~ 9.14
0.8	0.045 *	2.70	2.57 ~ 2.84	0.196	11.76	11.17 ~ 12.35
0.9	0.060 *	3.60	3.42 ~ 3.78	0.246	14.76	14.02 ~ 15.50
1.0	0.075	4.50	4.28 ~ 4.73	0.290	17.40	16.53 ~ 18.27
1.1	0.090	5.40	5.13 ~ 5.67	0.341	20.46	19.44 ~ 21.48
1.2	0.105	6.30	5.99 ~ 6.62	0.391	23.46	22.29 ~ 24.63
1.3	0.120	7.20	6.84 ~ 7.56	0.442	26.52	25.19 ~ 27.85
1.4	0.135	8.10	7.70 ~ 8.51	0.492	29.52	28.04 ~ 31.00
1.5	0.150	9.00	8.55 ~ 9.45	0.543	32.58	30.95 ~ 34.21
1.6	0.166	9.96	9.46 ~ 10.46	0.593	35.58	33.80 ~ 37.36
1.7	0.182	10.92	10.37 ~ 11.47	0.644	38.64	36.71 ~ 40.57
1.8	0.198	11.88	11.29 ~ 12.47	0.694	41.64	39.56 ~ 43.72
1.9	0.214	12.84	12.20 ~ 13.48	0.738	44.28	42.07 ~ 46.49
2.0	0.230	13.80	13.11 ~ 14.49	0.789	47.34	44.97 ~ 49.71
2.1	0.246	14.76	14.02 ~ 15.50	0.839	50.34	47.82 ~ 52.86
2.2	0.262	15.72	14.93 ~ 16.51	0.890	53.40	50.73 ~ 56.07
2.3	0.278	16.68	15.85 ~ 17.51	0.940	56.40	53.58 ~ 59.22
2.4	0.294	17.64	16.76 ~ 18.52	0.991	59.46	56.49 ~ 62.43
2.5	0.310	18.60	17.67 ~ 19.53	1.041	62.46	59.34 ~ 65.58
2.6	0.324	19.44	18.47 ~ 20.41	1.073	64.38	61.16 ~ 67.60
2.7	0.338	20.28	19.27 ~ 21.29	1.098	65.88	62.59 ~ 69.17
2.8	0.352	21.12	20.06 ~ 22.18	1.129	67.74	64.35 ~ 71.13
2.9	0.366	21.96	20.86 ~ 23.06	1.161	69.66	66.18 ~ 73.14
3.0	0.380	22.80	21.66 ~ 23.94	1.192	71.52	67.94 ~ 75.10
3.1	0.394	23.64	22.46 ~ 24.82	1.218	73.08	69.43 ~ 76.73
3.2	0.408	24.48	23.26 ~ 25.70	1.249	74.94	71.19 ~ 78.69
3.3	0.422	25.32	24.05 ~ 26.59	1.281	76.86	73.02 ~ 80.70
3.4	0.436	26.16	24.85 ~ 27.47	1.312	78.72	74.78 ~ 82.66
3.5	0.450	27.00	25.65 ~ 28.35	1.338	80.28	76.27 ~ 84.29
3.6	0.463	27.78	26.39 ~ 29.17	1.369	82.14	78.03 ~ 86.25
3.7	0.476	28.56	27.13 ~ 29.99	1.401	84.06	79.86 ~ 88.26
3.8	0.489	29.34	27.87 ~ 30.81	1.432	85.92	81.62 ~ 90.22
3.9	0.502	30.12	28.61 ~ 31.63	1.457	87.42	83.05 ~ 91.79
4.0	0.516	30.96	29.41 ~ 32.51	1.489	89.34	84.87 ~ 93.81
4.1	0.526	31.56	29.98 ~ 33.14	1.514	90.84	86.30 ~ 95.38
4.2	0.537	32.22	30.61 ~ 33.83	1.533	91.98	87.38 ~ 96.58
4.3	0.548	32.88	31.24 ~ 34.52	1.558	93.48	88.81 ~ 98.15
4.4	0.559	33.54	31.86 ~ 35.22	1.577	94.62	89.89 ~ 99.35

*流量制御 ± 15%

この表は国際単位(SI)に基づき流量の単位はL/secですが、便宜上L/minも表示いたしました。

1 kPa=0.01019716 kg/cm²


流量選定チャート

FlowCon SH

ダイヤル設定値	DN15/20 L/sec	NO:1A00000 L/min	公差 (±5%)	DN25/32 NO:1A00001 L/sec	L/min	公差 (±5%)
4.5	0.570	34.20	32.49 ~ 35.91	1.602	96.12	91.31 ~ 100.93
4.6	0.581	34.86	33.12 ~ 36.60	1.621	97.26	92.40 ~ 102.12
4.7	0.592	35.52	33.74 ~ 37.30	1.647	98.82	93.88 ~ 103.76
4.8	0.603	36.18	34.37 ~ 37.99	1.672	100.32	95.30 ~ 105.34
4.9	0.614	36.84	35.00 ~ 38.68	1.697	101.82	96.73 ~ 106.91
5.0	0.625	37.50	35.63 ~ 39.38	1.722	103.32	98.15 ~ 108.49
5.1	0.633	37.98	36.08 ~ 39.88	1.741	104.46	99.24 ~ 109.68
5.2	0.641	38.46	36.54 ~ 40.38	1.767	106.02	100.72 ~ 111.32
5.3	0.649	38.94	36.99 ~ 40.89	1.785	107.10	101.75 ~ 112.46
5.4	0.657	39.42	37.45 ~ 41.39	1.811	108.66	103.23 ~ 114.09
5.5	0.665	39.90	37.91 ~ 41.90	1.830	109.80	104.31 ~ 115.29
5.6	0.673	40.38	38.36 ~ 42.40	1.855	111.30	105.74 ~ 116.87
5.7	0.681	40.86	38.82 ~ 42.90	1.880	112.80	107.16 ~ 118.44
5.8	0.689	41.34	39.27 ~ 43.41	1.899	113.94	108.24 ~ 119.64
5.9	0.697	41.82	39.73 ~ 43.91	1.924	115.44	109.67 ~ 121.21
6.0	0.705	42.30	40.19 ~ 44.42	1.949	116.94	111.09 ~ 122.79

差圧制御範囲 : 33 - 300 kPa(0.34 - 3.06 kg/cm²)

圧力損失 : 3.3mAq

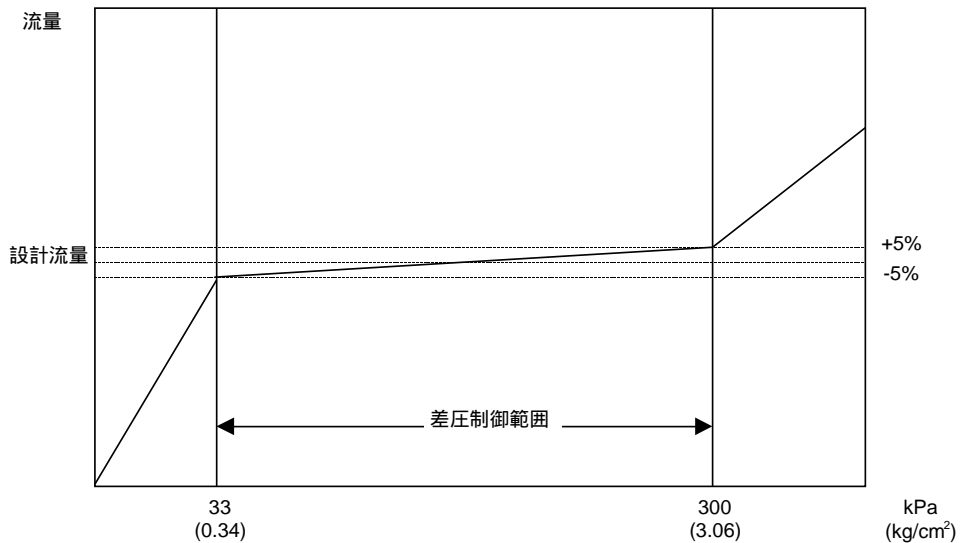

仕様は予告なく変更することがあります。

この表は国際単位(SI)に基づき流量の単位はL/secですが、便宜上L/minも表示いたしました。

1 kPa=0.01019716 kg/cm²